


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	新版发行	2023/12/25	Sam

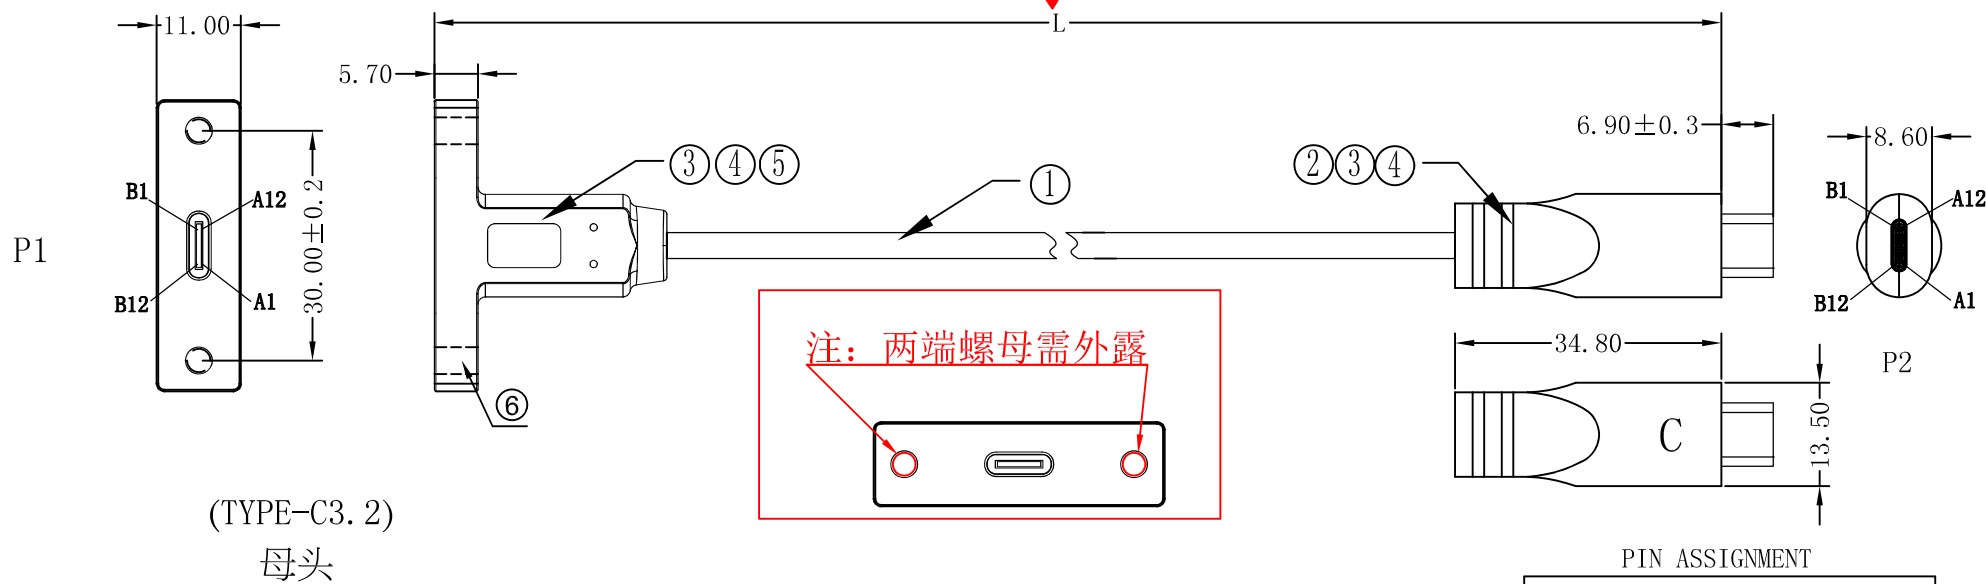

注：两端螺母需外露

PIN ASSIGNMENT

P1				P2				
A1	B1	A12	B12	黑 GND	A1	B1	A12	B12
A4	B4	A9	B9	红 VBUS	A4	B4	A9	B9
A2	TX1	+		蓝	A2	TX1	+	
A3	TX1	-		黑	A3	TX1	-	
A5	CC			蓝	A5	CC		
A6	B6	D+		绿	A6	B6	D+	
A7	B7	D-		白	A7	B7	D-	
A10	RX2-			棕	A10	RX2-		
A11	RX2+			橙	A11	RX2+		
B2	TX2+			红	B2	TX2+		
B3	TX2-			白	B3	TX2-		
A8	SBU1			橙	A8	SBU1		
B8	SBU2			紫	B8	SBU2		
B5	Vconn			黄	B5	Vconn		
B10	RX1-			绿	B10	RX1-		
B11	RX1+			黄	B11	RX1+		
Shell					Shell			

NOTES:

- 1: ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE ARE NOT PERMITTED.
- 2: CABLE MUST IS RoHS COMPLIANT
- 3: TEST CANDITIONS:TEST VOLTAGE: DC 300V/0.01S
INSULATION RESISTANCE: 10M ohm(MIN)
CONDUCTION RESISTANCE: 3 ohm(MAX)

USB31-CMPCF-XXXX

XXXX="L"MM

USB31-CMPCF-0300,Tolerance±20.0MM

USB31-CMPCF-1000,Tolerance±30.0MM

USB31-CMPCF-2000,Tolerance±50.0MM

Marked"▼"Shoud Be FAI DIM.

NO	P/N	DESCRIPTION	QTY	UNIT
6	螺母	螺母: 铜料 Φ5.0*1.5.6 M3	2	PCS
5	CONN.	USB 3.2 TYPE C TO C 母头- 短体-柳合款外壳, 夹板式母座, 16个焊盘	1	SET
4	INNERMOLD	LD-PE TS001	5	g
3	OVERMOLD	PVC 35P BLACK	15	g
2	CONN.	Type C male, 端子镀金1u 外壳拉伸镀镍, 黑色胶芯, USB 3.2 PD功能, 无IC, 有一个10NF电容	1	SET
1	CABLE	NO-UL USB3.2 [1P*32#(7/0.08TCID :0.58MM FM-PE)+AL+HM]*4C+1P*32#(7/0.08TCID:0.45MM HD-PE)+4C*32#(7/0.08TCID:0.45MM HDPE)+2C*22#(17/0.16TCID:1.10MM HDPE)+AL +B(64/0.08TC) OD:5.0±0.15MM PVC, BLACK		mm

X ±	X° ±	NAME:	NET MECHANISM Corp		
.X ±	.X° ±	BD	www.cabling-ol.net		
.XX ±	.XX° ±	UNITS:	PART NO.:	TITLE:	
		MM	USB31-CMPCF-XXXX	USB3.2 CM TO CF(带M3螺母) Cable GEN2	
		Sam	郭兴	李日凯	DWG NO.:
		2023/12/25	2023/12/25	2023/12/25	USB31-CMPCF-XXXX
		APPD BY	CHECK BY	DRAWN BY	SCALE SHEET REV.
					NONE 1/1 A

